


1. USE

Category 6 RJ 45 socket for high speed transmission (Gigabit Ethernet).
The mechanism can be flush-mounted or surface-mounted in 40 mm depth box min.
To be equipped with frame and plates.
Fixing with clips.

2. RANGE

	Description	Cat. No
	Keystone Cat. 6 RJ 45 connector - Grey UTP socket with fast connection	0 331 81
	Keystone Cat. 6 RJ 45 connector - White UTP socket with fast connection	0 331 61


3. DIMENSIONS (mm)

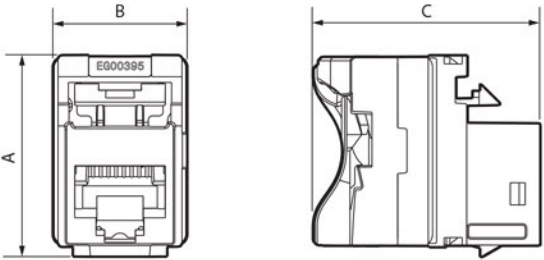

A	B	C
27	18	30

4. CONNECTION

Accepts the following cable connectors:
RJ 11 (4 contacts), RJ 12 (6 contacts), RJ 45 (9 contacts).
Double colour T568A and T568B on terminals:
UTP 8 contacts

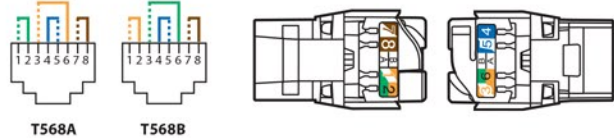

Conductors supported:
- Solid/stranded 0.4 to 0.65 mm, AWG 26 to 22
- Polyethylene conductor insulation Ø 0.85 to 1.7 mm on insulation.
RJ45 connectors are equipped with a rotation locking that does not require special tool and enables re-wiring in the event of error.

